
## It is all good design, quality, delivery and cost.

### envirotank

### Single Wall Tanks

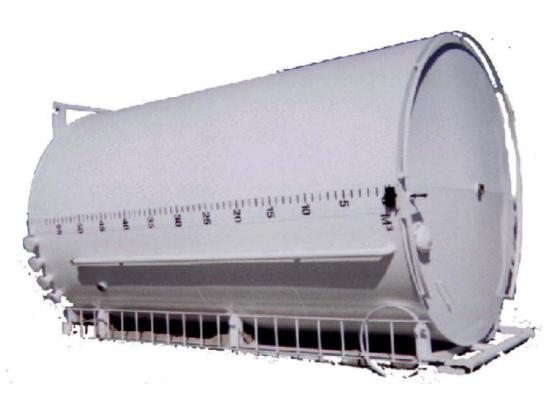

AGI can design and build an oilfield tank to meet your needs.

Select from our standard stock models or allow us to custom build a tank to your specifications.

At AGI we have our own in house tank lining and insulating facility. Our quality is very high and documented.

#### Standard Features

- API labeled
- Lift lugs & L-skid
  - Ladder and hoop
- Open style gauge board (Cubic Meter)
- 5 four inch flanges
- Three inch down comer
- Roof tow rail
- Sandblasted to SSPC-SP6 (brush blast)
- Rust resistant epoxy primer & enamel top coat

# It is all good design, quality, delivery and cost.

#### Optional Features

- Ladder with cage
- Tank lining Devoe, Enviroline Philips etc..
- Heavy duty L-skid
- Bottom skid
- Sour service thief Hatch & gaskets
- Sealed sour service gauge board
- Urethane or aluminum clad insulation
- Fire tubes, immersion heaters or steam coils
- Butterfly valves & plugs



Capacity	Diameter		Height		Weight	
27 bbl	5' 8"	1727mm	6'	1829mm	1,600 lbs	727 kg
50 bbl	8'	2438mm	6'	1829mm	2,700 lbs	1227 kg
100 bbl	11'	3353mm	6'	1829mm	3,900 lbs	1775 kg
200 bbl	9' 10"	2997mm	16'	4877mm	7,000 lbs	3180 kg
400 bbl	12'	3657 mm	20'	6096 mm	11,000 lbs	4,990 kg
500 bbl	12'	3657 mm	25'	7620 mm	12,500 lbs	5,670 kg
750 bbl	15'3"	4648 mm	24'	7315 mm	14,000 lbs	6,350 kg
1000 bbl	15'3"	4648 mm	32'	9754 mm	17,000 lbs	7,711 kg
1000 bbl	21' 6"	6553 mm	16'	4877 mm	18,000 lbs	8,165 kg
1500 bbl	21' 6"	6553 mm	24'	7315 mm	22,000 lbs	9,979 kg
2000 bbl	23' 6"	7163 mm	26'	7925 mm	27,000 lbs	12,247kg